




Strain Gauges LF series CE



This is a foil strain gauge utilizing special plastics for the backing. It has a grid designed for materials with low elastic modulus, and the stiffening effect on the measurement object is reduced. This strain gauge is CE marked (compliant to RoHS2 Directive) and has joined to our "GOBLET" series.

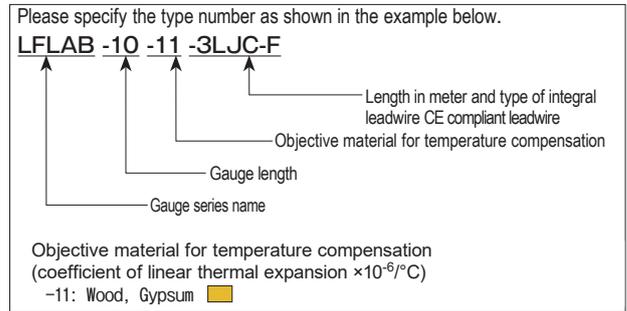

Operating temperature range -30~+80°C	Applicable adhesives CN-E -30~+80°C
Temperature compensation range +10~+80°C	

Gauge pattern	Type	Gauge size(mm)		Backing size(mm)		Resistance Ω
		Length	Width	Length	Width	
<p>● Single axis</p> <p>LFLAB-10-11</p>	LFLAB-10-11	10	3.1	18.5	5.3	120
<p>Minimum order quantity is 10 strain gauges. These strain gauges are available with integral leadwires attached. (made to order)</p>						

Dedicated leadwire recommended for LF series strain gauges (made to order)

We supply various leadwires dedicated to strain gauges so as to meet our customers' requirements. Please refer to page 32 to 40 for the details of combination of a strain gauge and a leadwire. For CE marked GOBLET series strain gauges, only the leadwires using lead-free solder are available.

Type and designation of leadwires (GOBLET)

Usage	Leadwire name	Operating temperature range of leadwire (°C)	Type number example
General purpose (without temperature change)	Paralleled vinyl LJB-F	-20 ~ +80	LFLAB-10-11-3 LJB-F
	Paralleled vinyl LJC-F		LFLAB-10-11-3 LJC-F
General use	3-wire paralleled vinyl LJBT-F	-20 ~ +80	LFLAB-10-11-3 LJBT-F
	3-wire paralleled vinyl LJCT-F		LFLAB-10-11-3 LJCT-F
1-Gauge 4-Wire measurement	Polypropyrene 4-wire paralleled LQM-F	-20 ~ +80	LFLAB-10-11-3 LQM-F (modular plug attached)